



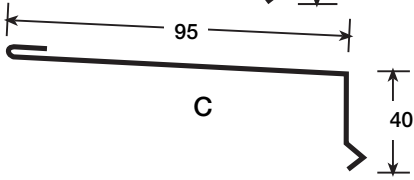
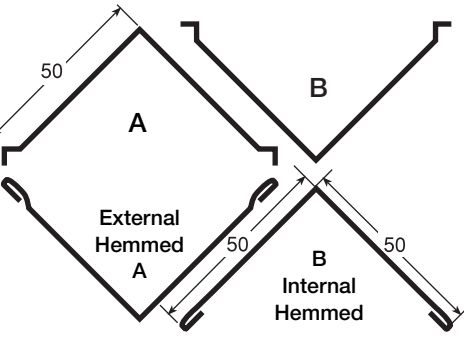
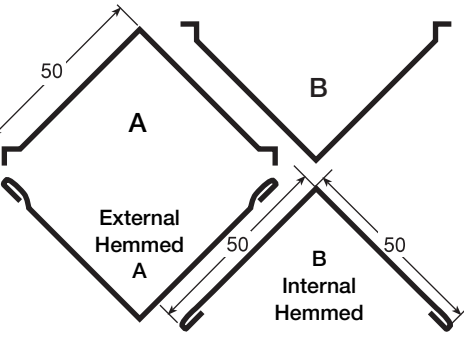
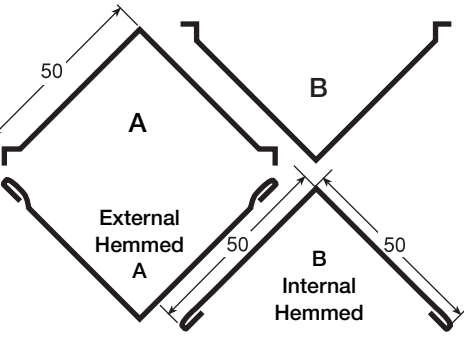
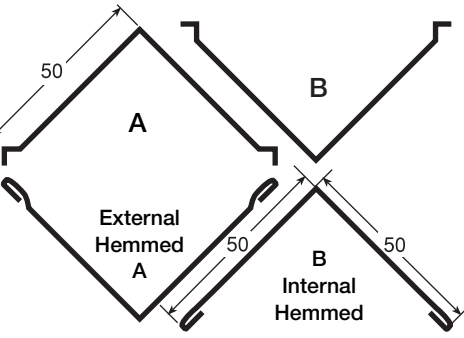



'NEW PROFILE' GALVANISED FLASHINGS (E2AS1 ACCEPTABLE FLASHING SOLUTIONS)

All Lengths are 2400mm x 0.55mm unless specified

DESCRIPTION	GALVANISED		STAINLESS STEEL	COPPER	
	Price	Part No	Price	Price	Pack Size
 <p>External</p>		40180	P.O.A	P.O.A	1
 <p>Internal</p>		40170	P.O.A	P.O.A	1
SILL FLASHING					
 <p>A</p>		40910	P.O.A	P.O.A	1
 <p>B</p>		40915	P.O.A	P.O.A	1
 <p>C</p>		40920	P.O.A	P.O.A	1
 <p>External Corner (A)</p>		40102	P.O.A	P.O.A	25
 <p>External Hemmed (A)</p>		40105	P.O.A	P.O.A	25
 <p>Internal Corner (B)</p>		40112	P.O.A	P.O.A	25
 <p>Internal Hemmed (B)</p>		40115	P.O.A	P.O.A	25
 <p>Flat Cover Batten</p>		40122	P.O.A	P.O.A	25